
MOLICE C



Enhanced Protection, Fire Containment, Improved Safety, Code Compliance, Insurance Savings


Single Leaf Fire Rated Steel Door

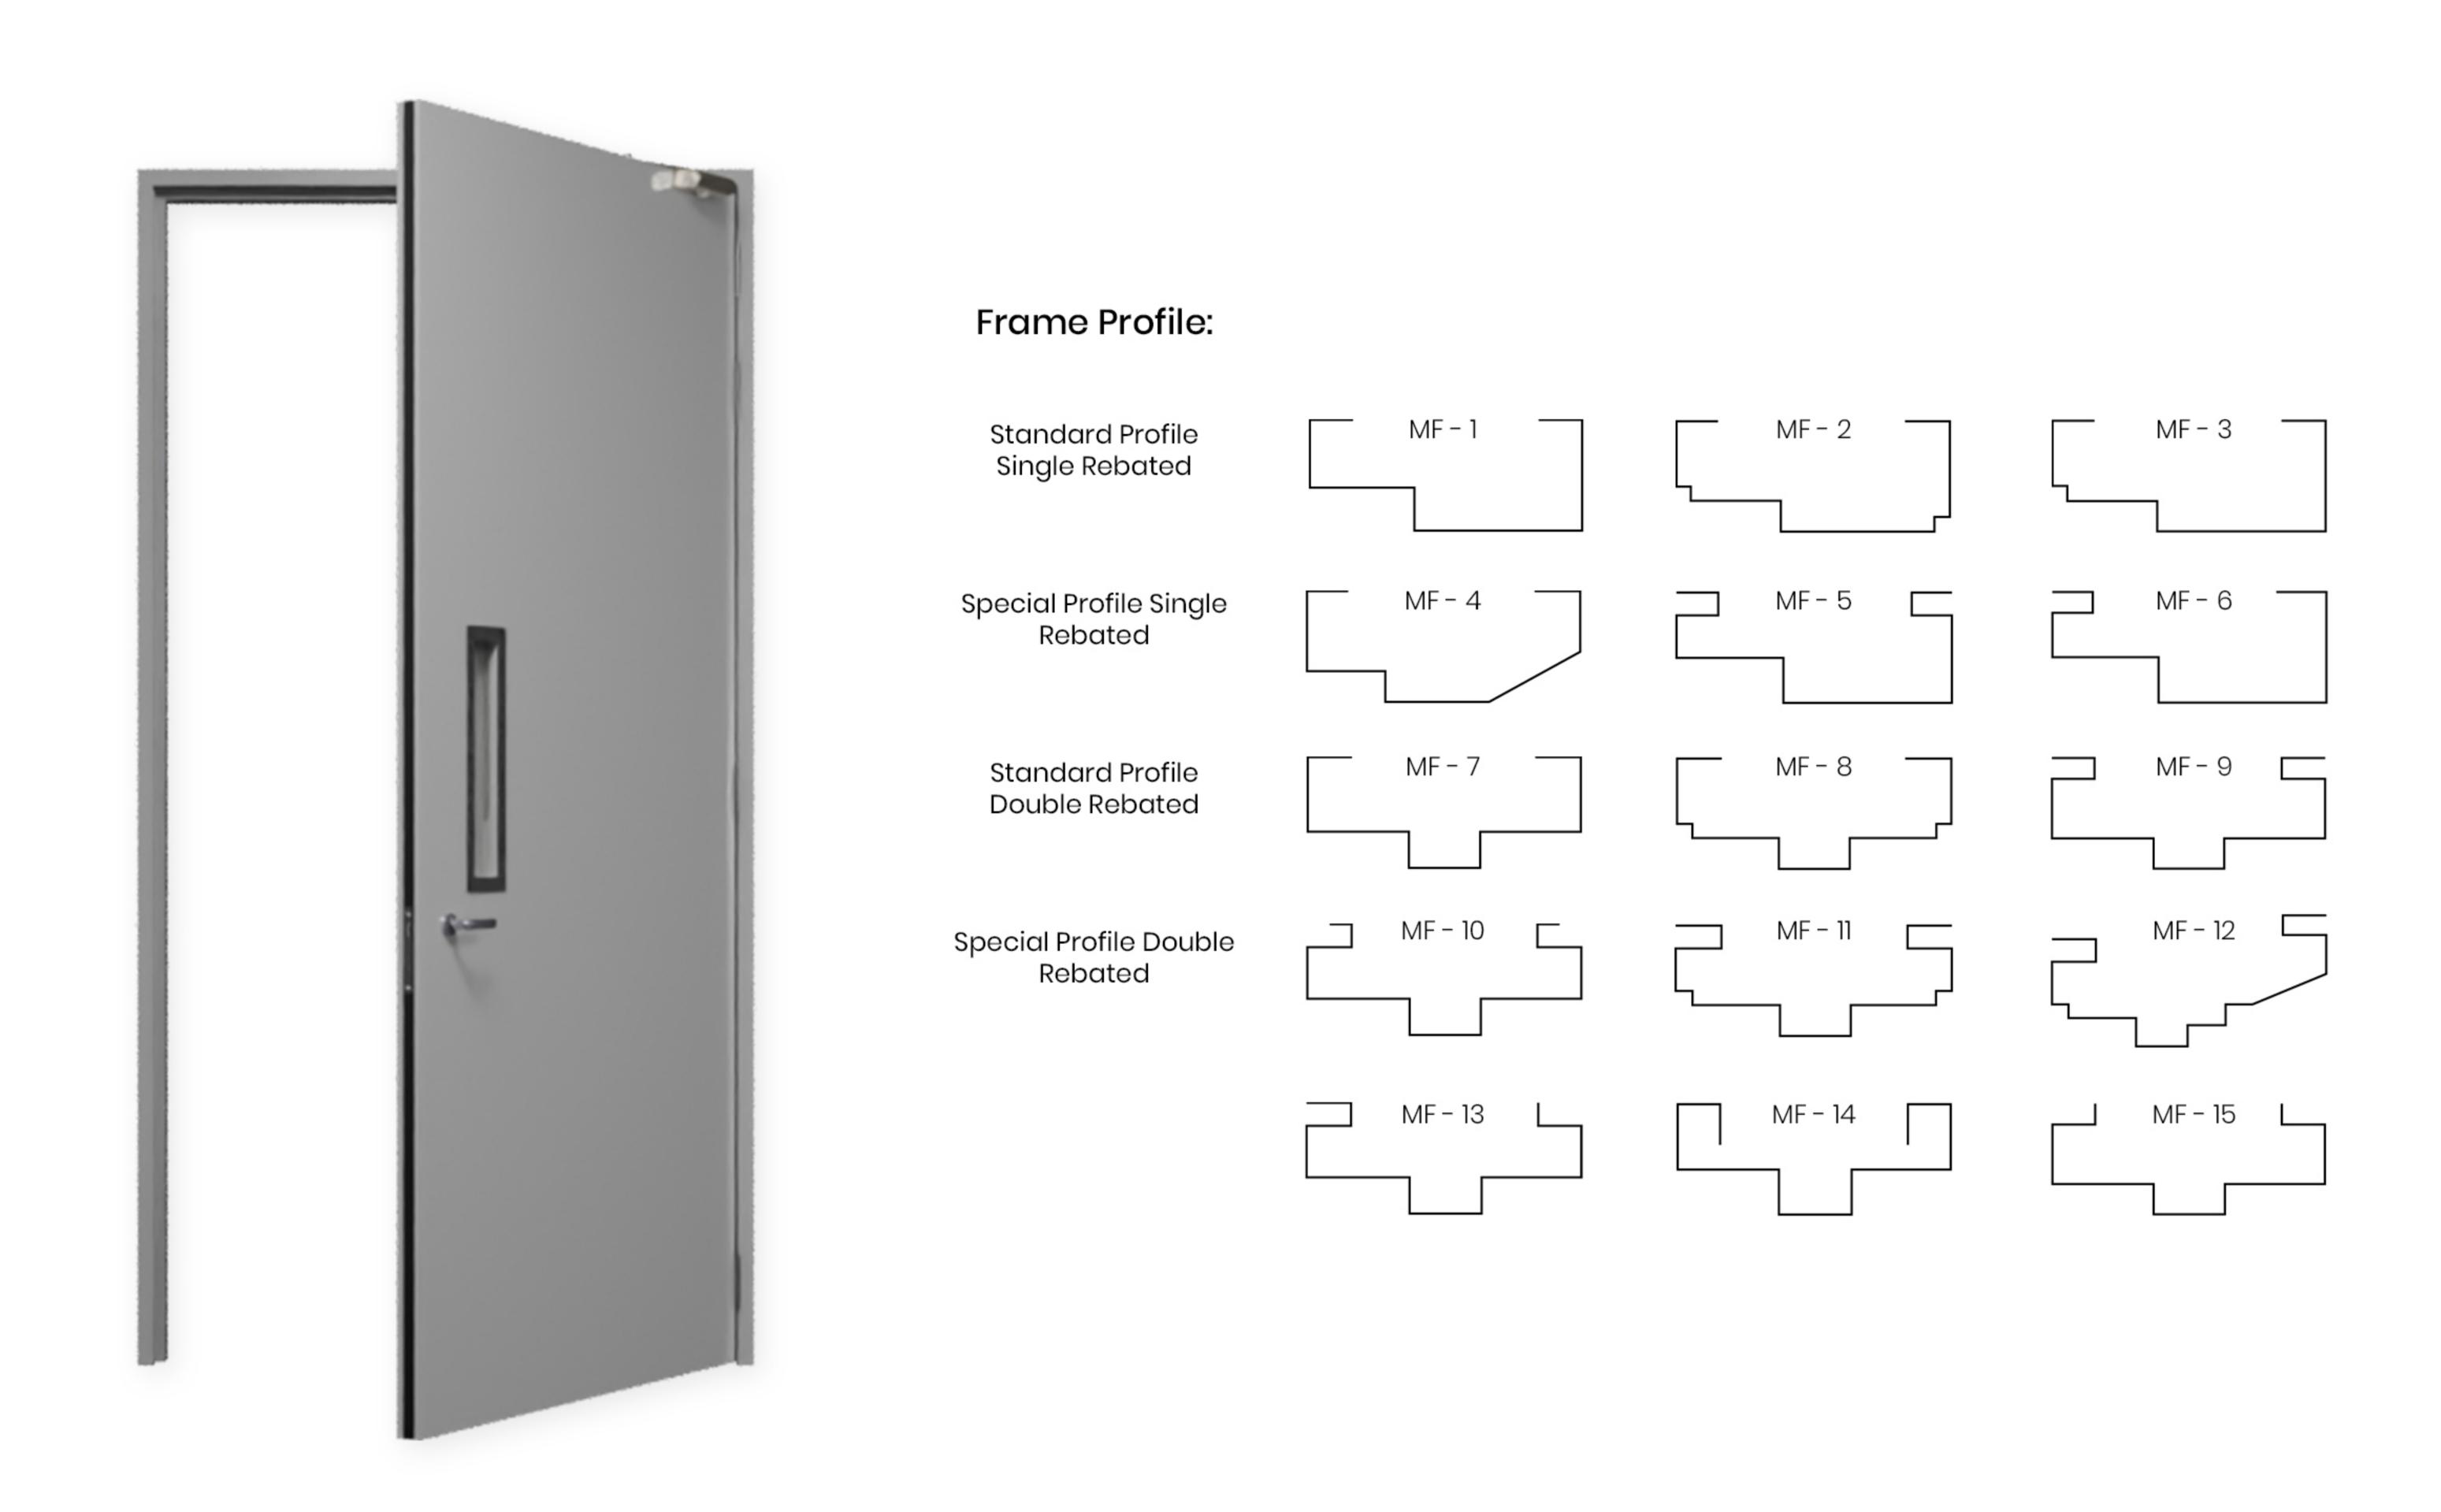

Ironmongery



Double Leaf Fire Rated Steel Door

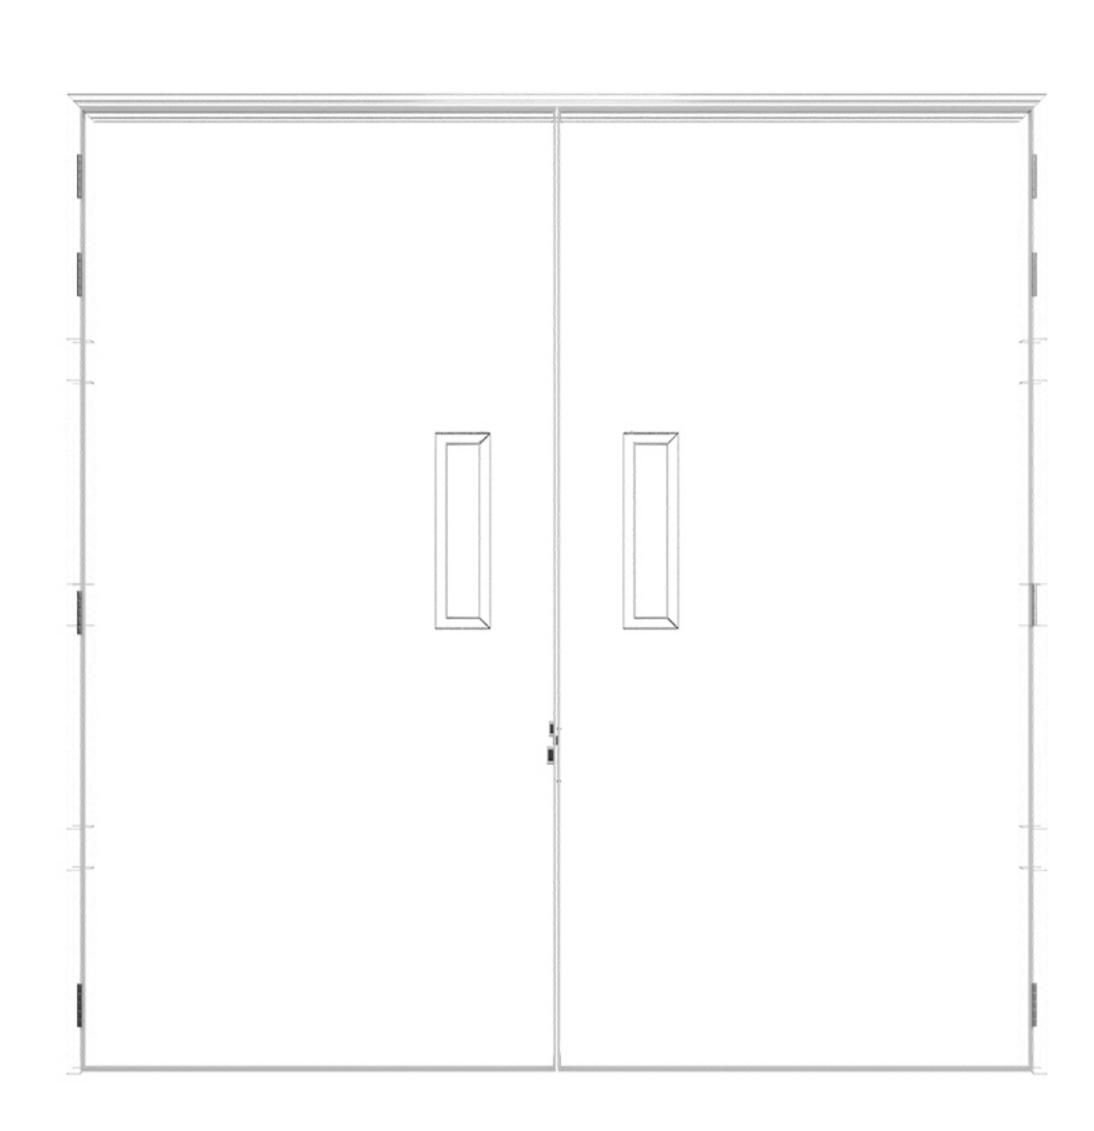


two hinged panels or leaves that open simultaneously, providing a wider entryway and often used in spaces requiring large openings, such as entrances or conference rooms.





Door Closer mechanical device

A mechanical device that automatically closes a door after it has been opened, ensuring it shuts securely and quietly.

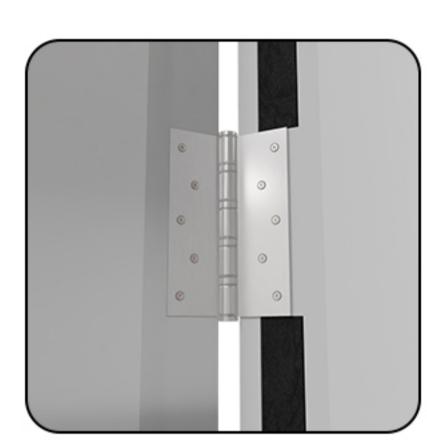

Door Hinge

A mechanical device that allows a door to pivot open and closed, typically consisting of two interlocking metal plates, providing support and enabling smooth movement.



Perimeter Seal

A weatherproofing strip installed around doors or windows to prevent drafts, water, and dust from entering a building, improving energy efficiency and comfort.



Panic Exit

A safety feature designed to allow quick and easy exit from a building during an emergency, typically equipped with a push bar or lever that opens the door without the need for a key or handle.



Door Frame

Specialized frame designed to support a fire-rated door that can withstand high temperatures and prevent the spread of fire and smoke for a specific duration, ensuring safety and compliance with building codes.



Vision Panel

Enhanced safety and security by allowing individuals to visually assess the other side of a door or wall without opening it, improving visibility and communication.


Specification

	FIRE RATED STEEL DOOR - SINGLE LEAF	FIRE RATED STEEL DOOR - DOUBLE LEAF
DOOR FRAME	1.2mm / 1.5mm GALVANIZED STEEL	
	Cusomizable Frame Profile	
DOOR SIZE	MAX SIZE : 1500MM X 3300M	MAX SIZE : 3000MM X 3300M
DOOR THICKNESS	±60MM	
DOOR FACING	0.8mm / 1.0mm / 1.2mm / 1.5mm GALVANIZED STEEL	
DOOR FINISH	BARE / ANTI-RUST PRIMER (OPTIONAL) / POWDER COATING (OPTIONAL)	
DOOR CORE	FIREPROOF COMPOSITE BOARD	
OPTIONAL FEATURE	VISION PANEL / KICK PLATE / DOOR SILL / PERIMETER SEAL / DROPSEAL / PANIC EXIT	

Molicc System Sdn Bhd (483528-K)

a member of MLFD GROUP

www.molicc.com

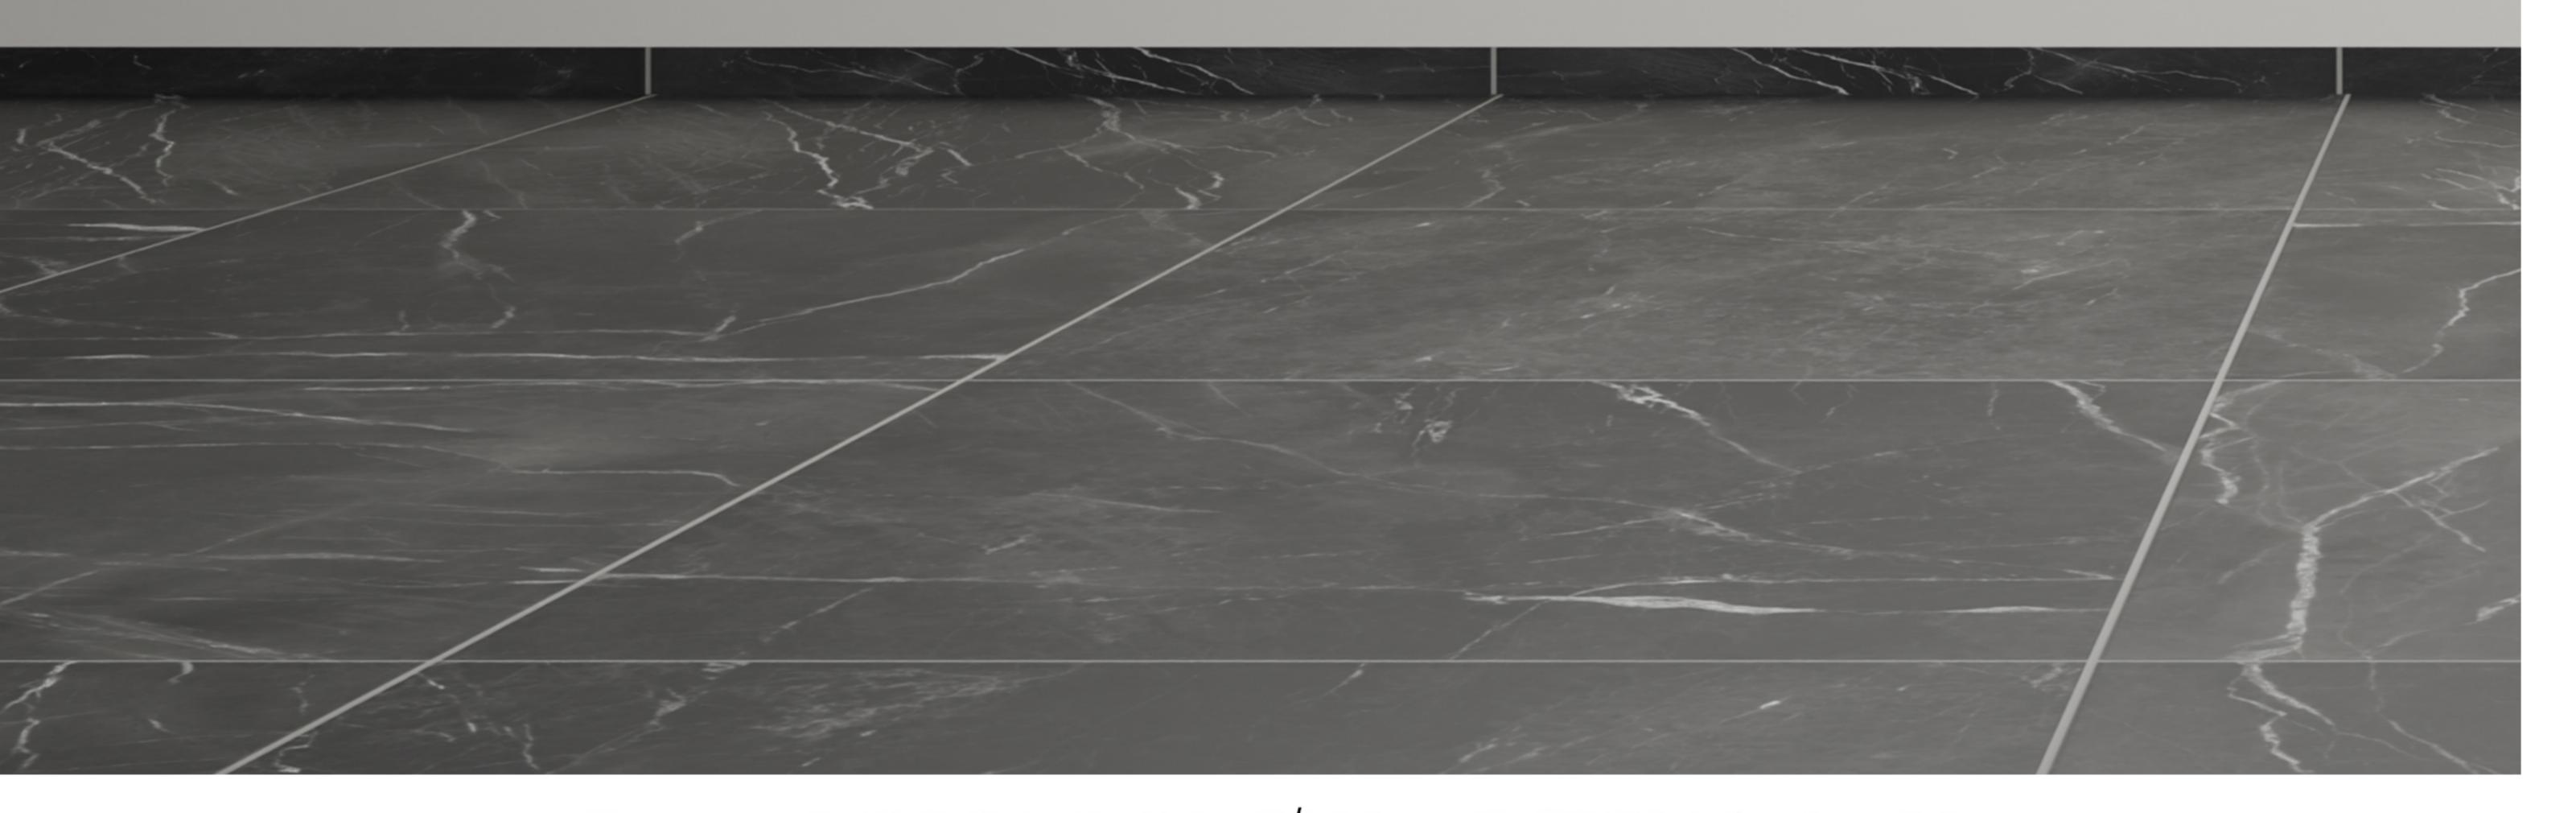

Showroom : No.70, Jln Dato Abu Bakar 16/1, Seksyen 16, 46350 Petaling Jaya, Selangor

Office : No.1405, Jalan Ipoh, Batu 29, 44300 Batang Kali, Selangor

Tel: +603 - 6075 267/2787 Fax: +603 - 6075 3787 Email: info@molicc.com

Contact : Thomas (+6010 - 288 2687)